

/ BROKK 200⁺



- Increased uptime and power over time
- Smart sensors and operator support system
- Lightweight control box with tilted joysticks
- Small footprint given its power and reach
- 27.5 kW Brokk SmartPower+ electrical system



The **Brokk 200⁺** takes demolition to the next level, offering added intelligence through smart sensors and a sophisticated operator support system that provides real-time updates.

Despite its size, this robot accommodates heavy attachments and outperforms competitors in power-to-size ratio.

Hydraulic breaker in images: BHB 305
Load and stability diagram available on request

TECHNICAL DATA

Slewing speed	10 sec/360°
Transport speed, max.	2.1 km/h; 1.3 mph
Climbing inclination, max.	30°
Hydraulic system capacity	85 l; 22.5 US gal
Pump type	Variable load-sensing
System pressure	18 MPa; 2611 psi
Increased pressure to attachment	23 MPa; 3336 psi
Pump flow 50 Hz	85 l/min; 22.5 US gal/min
60 Hz	102 l/min; 27 US gal/min
Power technology	Brokk SmartPower+
Electric motor type	ABB
Power*	27.5 kW
Recommended fuse size*	63 A
Starting device	Soft start/Direct start
Control type	Portable
Signal code	Digital
Transfer	Professional radio/Cable
Range, radio	Up to 300 m
Machine weight**	2100 kg; 4630 lbs
Recommended attachment weight	350 kg; 772 lbs
Sound power level L_{WA}***	87 dB(A)

*Valid for 400 V/50 Hz and 440 V/60 Hz


**Excluding options and attachment

***Measured according to directive 2000/14/EC, excl. attachment


OPTIONS

Extra cylinder protection
Rubber caterpillar tracks
Steel caterpillar tracks
Heat-resistant hoses
Forced draft cooling for machine
Forced draft cooling for breaker
Steel pads
Atomized water mist
Air flushing for breaker
Water spray for breaker
Extra hydraulic function
Drainage hose
CAN cable connection
Counterweight
Lifting eyes (regular lifting points are standard)
Motion warning
Load holding valves
Hose burst valves

SIZE

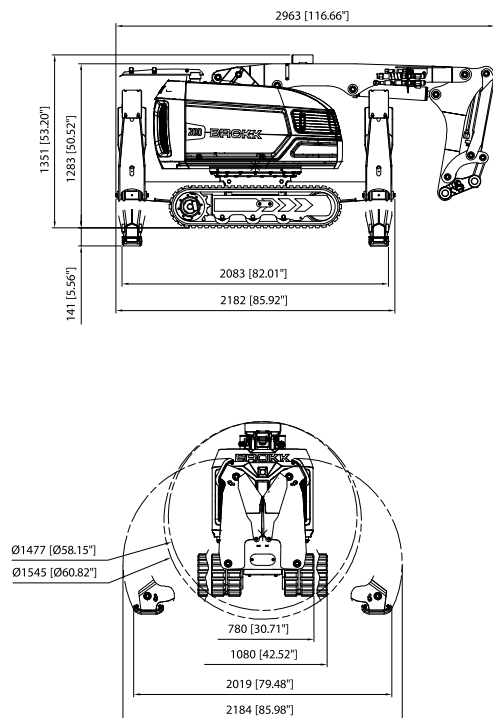

RANGE

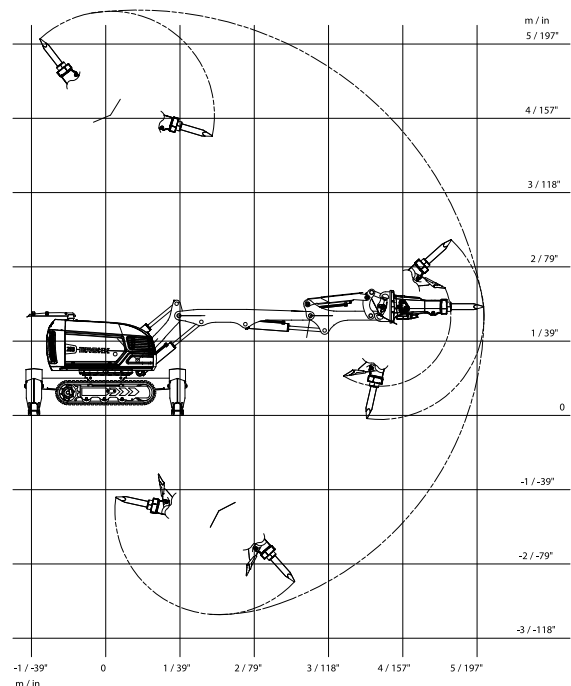

Tolerances for technical data may vary