

Pentrunder[®]

RS2i

THE SECOND GENERATION
HFi WALL SAW

Available now!

THE SECOND GENERATION OFFERS:

- Increased cutting performance and higher torque on lower RPMs for more power with bigger blades, in comparison to the RS2
- Automatic identification of blade diameter
- New remote control with backlit display
- BT-connection to the Pentrunder App for easier software updates and PP3i compatibility with coming HFi products
- Clean cut feature: an innovative arm plunge function to minimize overcuts
- More efficient Autofeed control and maximized operator experience.

As always with Pentrunder, it is possible to upgrade your existing RS2 Wall saw to a RS2i
– Contact your distributor for more information!

TECHNICAL DATA

BLADE INFO

Max saw blade diameter	1600 mm
Max cutting depth	715 mm
Max start Ø blade	830 mm

WEIGHT

Saw head incl. motor	24.5 kg
Pentpak 3i	15 kg

SAW BLADE MOTOR

Integrated torque motor
Reversible blade rotation

MAX OUTPUT POWER

18 kW

MAX OUTPUT TORQUE

148 Nm

SPINDLE SPEED UNDER LOAD

475 - 1125 rpm

MAX TRAVEL SPEED

2.6 m/min

MAX ARM SPEED

2.4 rpm/min

IP CLASSIFICATION

RS2i: IP65 PP3i: IP64

RS2i Wall saw & accessories




Saw head and drive system

RS2i-400	RS2i Wall saw
PP3i-400	Pentpak 3i
MCE-6-WE	Machine cable and water hose, 9m
RRCi	Autec Radio Remote Control, including cable, 2 batteries, charger and shoulder strap



Accessories

89090100	Waist belt for remote control
89090200	Shoulder strap for remote control
89090300	Shoulder hook for remote control
DTD	Template, double
DTS	Template, single
TY-RS2	Transport trolley for RS2/RS2i

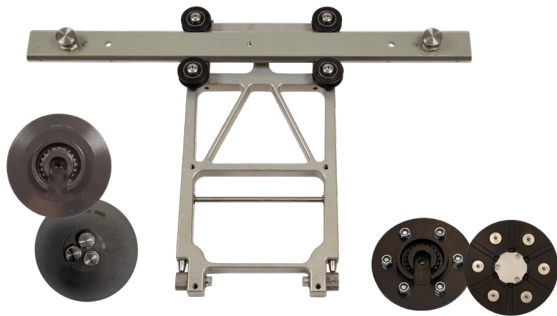

HF i Blade flanges and guard holder

GH-RS2	Blade guard holder for GPRS & GFRS blade guards
QERS-60	Blade flange RS Ø60 Bore
QEFRS	Flush cutting flange Ø60, BC = 130/ 110/ 108mm




HF i Blade guard full

GPRS-8	Blade guard RS, Ø 800 mm
GPRS-12	Blade guard RS, Ø 1200 mm
GPRS-16	Blade guard RS, Ø 1600 mm

HF i Blade guard flush

GFRS-8	Blade guard flush RS, Ø 800 mm
GFRS-12	Blade guard flush RS, Ø 1200 mm
GFRS-16	Blade guard flush RS, Ø 1600 mm

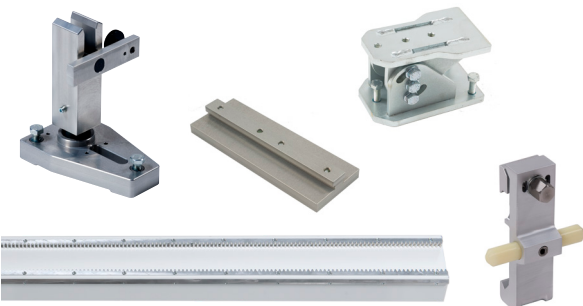

TS Track and accessories

TS-Track	Lengths: 0.85 / 1.15 / 1.7 / 2.0 / 2.3 / 3.45 m
TF2S	Track foot
TFAB	Angle adjustable track foot
TSS300	Joint block
TP3	Track stop

Pentrunder®
CONCRETE CUTTING SYSTEMS

Pentrunder - designed and manufactured by:
Tractive AB | Gjutargatan 54 | 781 70 Borlänge | Sweden
www.pentrunder.com | contact@pentrunder.com